
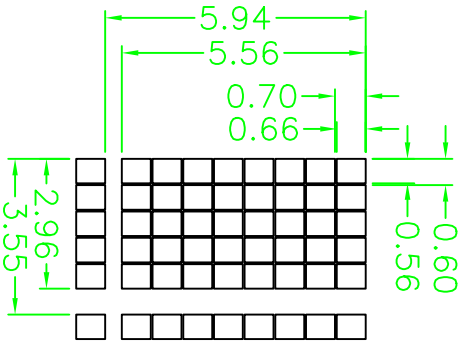
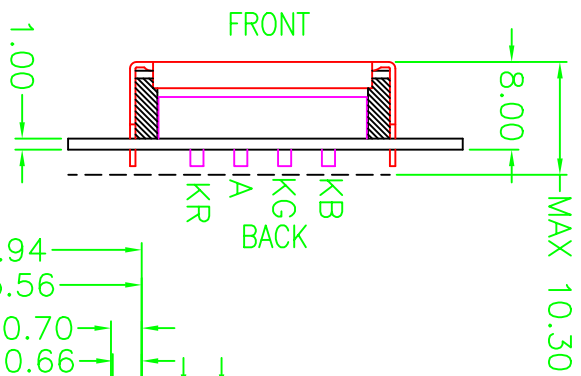


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	Sep-03-2005

VIEWING DIRECTION

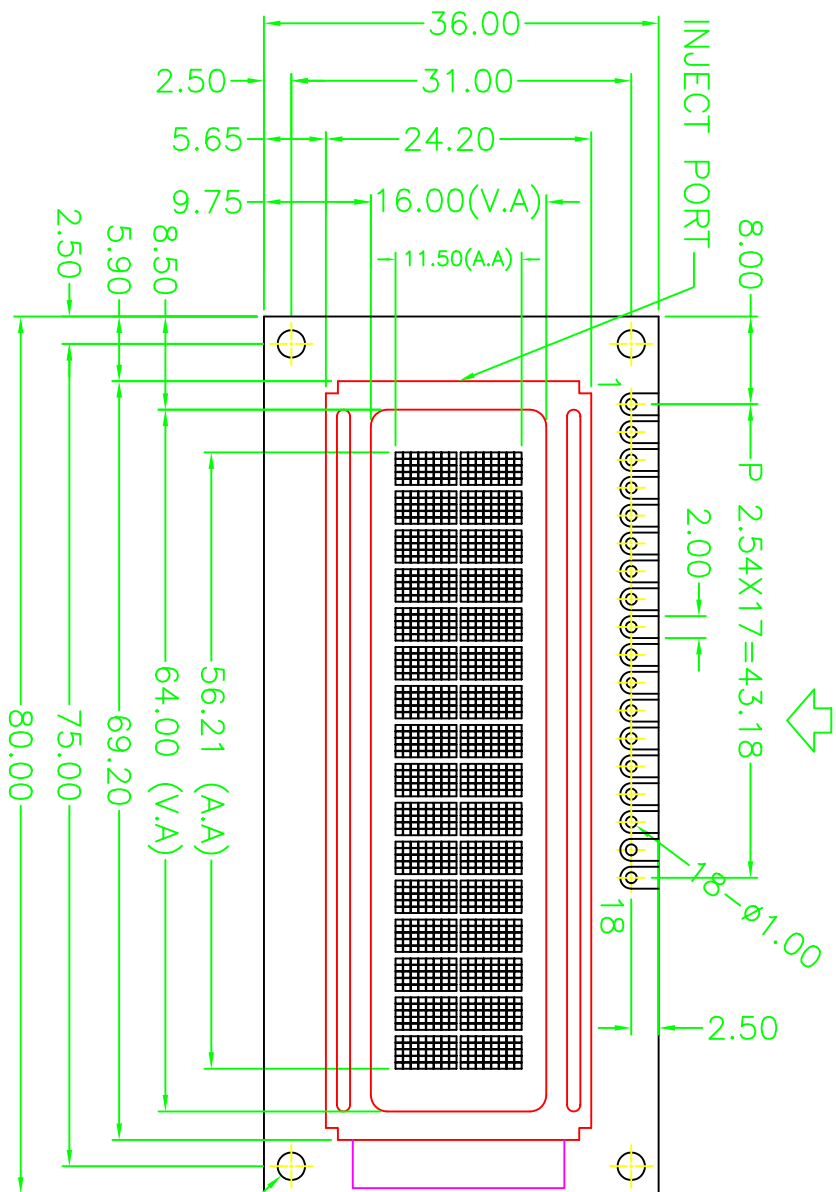

DOTS SIZE
SCALE 4:1

PIN	1	2	3	4	5	6	7	8	9
CONNECTOR	VSS	VDD	VO	RS	R/W	E	DB0	DB1	DB2
PIN	10	11	12	13	14	15	16	17	18
CONNECTOR	DB3	DB4	DB5	DB6	DB7	LEDKR	LEDA	LEDKG	LEDKB

- Specification:
- 1). Driving: Duty:1/16, Bias:1/5, Vdd:5.0V Vlcd:4.5V
 - 2). Viewing angle: 12 0'clock
 - 3). Display mode: STN/Positive/Transmissive/Grey
 - 4). Operating temp.: -20°C~+70°C
 - 5). Storage temp.: -30°C~+80°C
 - 6). Use IC: SPLC780C-02
 - 7). Backlight: Side RGB
 - 8). Dimensions with mark "*" are important, with mark "()" are referenced

		深圳秋田视佳实业有限公司 SHENZHEN AV-DISPLAY CO., LTD	
PART NO. 零件编号	C/D	PROJECTION 三角法	MODEL NUMBER 模组型号
FAV-ABC016002E09-00			ABC016002E09-G1S
SCALE: FIT 适应图面		GENERAL TOL: ±0.3	
比例		公差	
SHEET 页次	1 OF 1	APP: 签字	DATE 日期
CHK: DWN:			